


DETAIL NO. 7

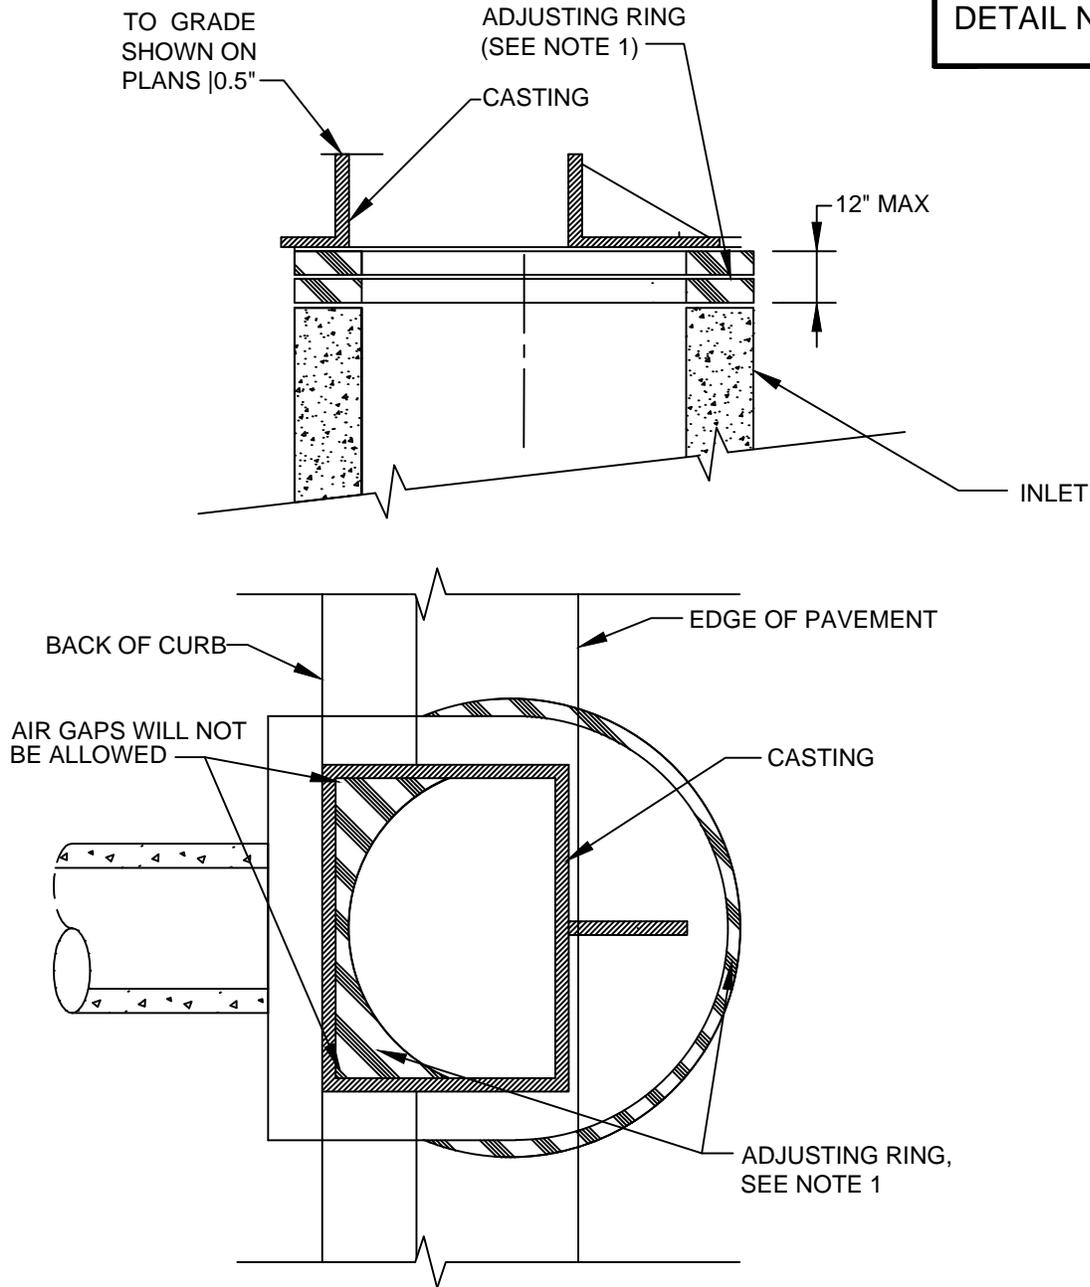

NO SCALE

NOTES:

1. THE MAXIMUM NUMBER OF ADJUSTING RINGS SHALL BE TWO. THE MAXIMUM HEIGHT OF ADJUSTMENT SHALL BE 12".
2. ALL ADJUSTMENTS IN THE CURB AND PAVEMENT SHALL USE PREFORMED RUBBER ADJUSTING RINGS.
3. IF THE CASTING MUST BE INSTALLED ON A SLOPE, PREFORMED RUBBER TAPERED RINGS MUST BE USED.
4. THE FOLLOWING CASTING, OR APPROVED EQUAL, SHALL BE UTILIZED AS INDICATED:
 - A. DRAINAGE STRUCTURES IN MOUNTABLE CURB AND GUTTER:
EAST JORDAN IRON WORKS # 7171 WITH TYPE M1 GRATE. THE "DRAINS TO CREEK" LOGO SHALL BE CAST INTO THE GRATE.
 - B. DRAINAGE STRUCTURES IN BARRIER CURB AND GUTTER:
EAST JORDAN IRON WORKS #7205 WITH TYPE M1 GRATE. THE "DRAINS TO CREEK" LOGO SHALL BE CAST INTO THE GRATE OR HOOD.
5. EJIW #7171 CASTINGS CAN OVERLAP STRUCTURE EDGES A MAXIMUM OF 2.5 INCHES
6. EJIW #7205 CASTINGS CAN OVERLAP STRUCTURE EDGES A MAXIMUM OF 2.0 INCHES.

VILLAGE OF NEW LENOX
STANDARD DETAIL
FOR
CORBELING OF
CURB INLETS

| | |
|-------|--------------|
| REV : | 1 |
| DATE: | AUGUST 2014 |
| FILE: | STORMTYPCORB |